N D V Y Technical file 1861

# Worktop induction hob - Novy Easy Recirculation 4-zones 80 cm Black

EAN 5414425220762



## Dimensions (mm)

 $\begin{array}{ll} \mbox{Dimensions (WxDxH) (mm)} & 800 \times 520 \times 225 \\ \mbox{Cut-out worktop (WxD)(mm)} & 750 \times 490 \\ \mbox{Dimensions cut-out with inset (WxDxH) (mm)} & 804 \times 524 \times 6 \\ \end{array}$ 

## Cooker hood

### **General information**

Integrated motor
Sound absorber

Number of metal grease filters
Recirculation
Dimensions exhaust (mm)
Position exhaust
Back left / Under left

### **Functions**

ControlRed slider touch controlNumber of speeds9 + PDelayed switch off (minutes)30Grease filter cleaning indication•Recirculation filter cleaning indication•Watertank(s) for cleaning•

1 - 3

v1.0

## Induction hob

### **General characteristics**

Black opaque glass Bevelled glass edge Surface and flushline mounting

# **Cooking zones**

Number of octagonal zones Cooking zones (mm) 240 x 210 Power per zone (max. / power) (W) 2100/3000

## **Cooking functions**

Control Red slider touch control Power levels 9 + Power Timer per zone Minute minder Stop&Go Keep warm function 70° Bridge function flexzones • (2x) Residual heat indication Automatic cooking Child lock function Automatic pan recognition Grill function

## **Technical specifications**

Maximum power 7.550 W 230 V / 400 V - 2N / 3N Tension Power cable (included) 1,5 m Power consumption in stand-by Ps (W) <0,5 W Weight (kg) 18,3


# **Accessories**

# **Accessories**

Connection adapter back panel Supplied with appliance


> 2 - 3 v1.0

# **Dimensions**

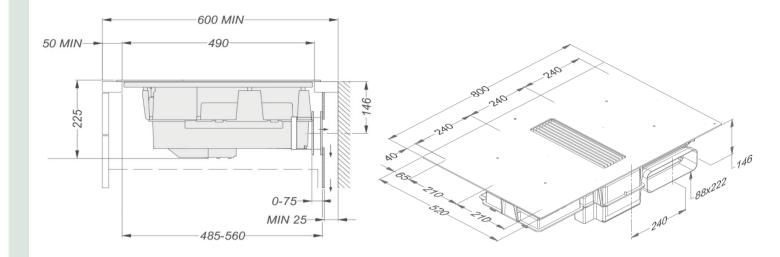

\*When installing directly against an uninsulated outside wall, we recommend using an installation kit with air outlet in the plinth.

# Surface mounting



# Flushline mounting R R ST ST ST

# **Dimensions**

Surface Flushmount

E	F	K	Р	R	S	Т	Х
750	490	4	6				55 min
750	490	4	6	7	804	524	55 min

